




Wet Hydrant

Description


STAND POST, 2-WAY FIRE HYDRANT

WET BARREL FIRE HYDRANT OPTIONS:


- * This hydrant is operated by using on and off wheels on its both sides of hydrant which operates its mechanism.
- * This hydrant seats (inlet) is available in two sizes 4" and 6".
- * This hydrant with two way valve which can be also with 4 way valve.
- * This hydrant with brass valve which also can be with gun metal.
- * This hydrant with two valve flange connection which can be also with thread connection.
- * This hydrant with working pressure 10 bar can also have a working pressure of 16 bar

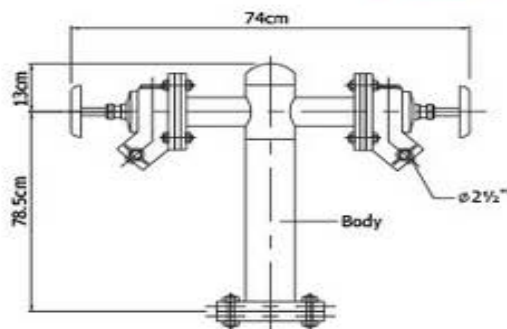

LANDING VALVE OPTIONS:

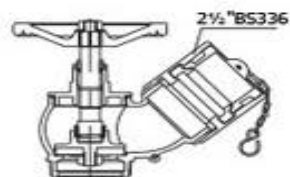

(THREAD TYPE)

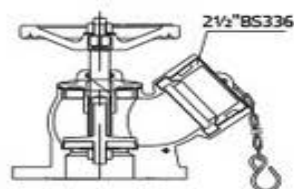

(FLANGE TYPE)

Specification:

	MODEL: BF-WT04	MODEL: BF-WT06
BODY:	Ø4" BLACK CS SEAMLESS PIPE ASTM A53 GRADE B SCH 40	Ø6" BLACK CS SEAMLESS PIPE ASTM A53 GRADE B SCH 40
VALVE DIAMETER:	2½" INLET x 2½" INSTANT OUTLET	2½" INLET x 2½" INSTANT OUTLET
VALVE SEAT:	BRASS	BRASS
VALVE MATERIAL:	BRASS	BRASS
TEST PRESSURE:	20 BAR	20 BAR
WORKING PRESSURE :	10 BAR	10 BAR
SURFACE TREATMENT :	POWDER COATING RED COLORS (RAL 3000)	POWDER COATING RED COLORS (RAL 3000)
FLANGE SIZE FOR INLET :	PN16 4"	PN16 6"
INLET :	100MM	150 MM
OUTLET :	2½" INLET x 2½" 65	2½" INLET x 2½" 65